



Elkay-EZH2O®

In-Wall Mounted Hands-free Filtered Bottle Filling Station

Mains Fed • In-Wall Mounted • Ambient • Chilled • Filtered



Looking for a surface mounted model? Take a look at the Elkay-Stream with bespoke branding

trial it, love it, keep it!

Request your no obligation 10 day trial

Call **01392 877 172** Email **hello@thirstywork.com**

www.thirstywork.com/free-trial

LZWSM82K

Elkay-EZH2O®

Mains fed, in-wall mounted, bottle filler
LZWSM82K



COLOUR OPTIONS



Stainless Steel



WATER OPTIONS



Ambient



Chilled



Filtered

Not all options are included as standard, please choose at point of order

INSTALLATION OPTIONS



Wall mounted



hydrateconsciously!
We're committed to reducing plastic waste

KEY FEATURES

- Electronic sensor activated bottle filler
- Ambient water (non-refrigerated)
- Optional remote chiller for refrigeration
- Chilling capacity: 80 litres per hour output
- In-wall mounted for indoor use
- Suitable for busy public environments
- Laminar flow provides minimal splash
- Silver Ion Antimicrobial protection on key plastic components to inhibit the growth of mould and mildew
- Full filter change and servicing package included
- Built-in drainage eliminates standing water
- With Elkay filtration

The Elkay EZH2O® In-Wall Mounted Hands-free Filtered Bottle Filling Station features a recessed design, allowing it to be built into your wall to save space.

The dispenser's auto sensor automatically starts and stops the water flow when a bottle is placed into position, helping to save water and electricity.

The integrated Green Ticker informs users just how many 20oz plastic water bottles have been saved from waste through the use of the refill station.

DIMENSIONS


Height:	1037mm
Width:	502mm
Depth:	90mm

IMPORTANT! INSTALLER PLEASE NOTE:


The grounding of electrical equipment such as telephone, computers, etc. to water lines is a common procedure. This grounding may be in the building or may occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which causes a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by using the proper material as indicated below. The drain fittings which are provided by the installer should also be plastic to electrically isolate the cooler from the building plumbing system.

These products are designed to operate on 20psi to 105psi supply line pressure.


OPERATION OF QUICK CONNECT FITTINGS




Pushing tube in before pulling it out helps to release tube




WaterSentry® Plus Filter System

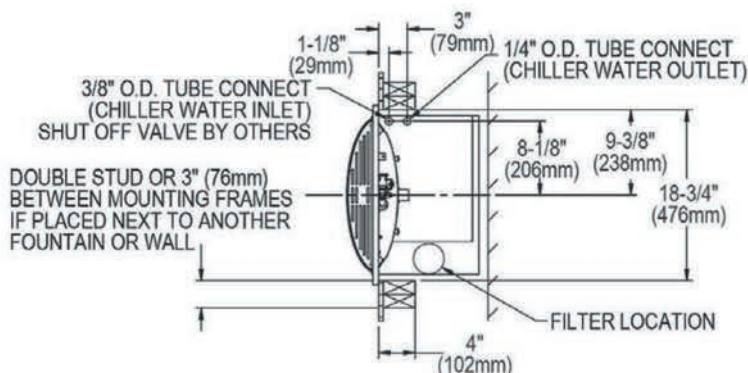

BOTTLE FILLER SPECIFICATIONS

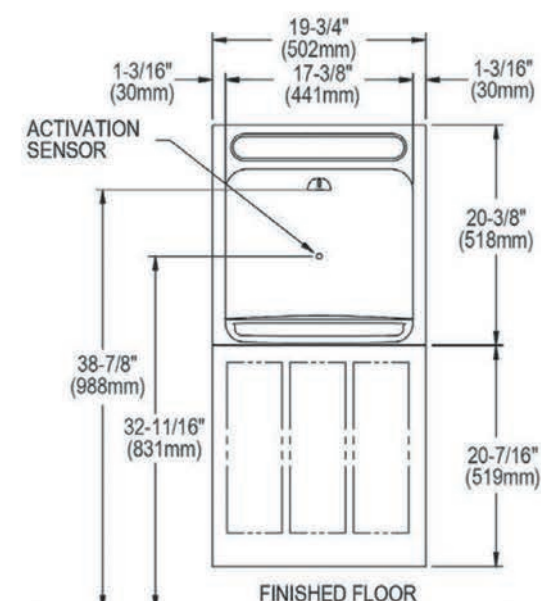

Note : New Installations Must Use Ground Fault Circuit Interrupter (GFCI). It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

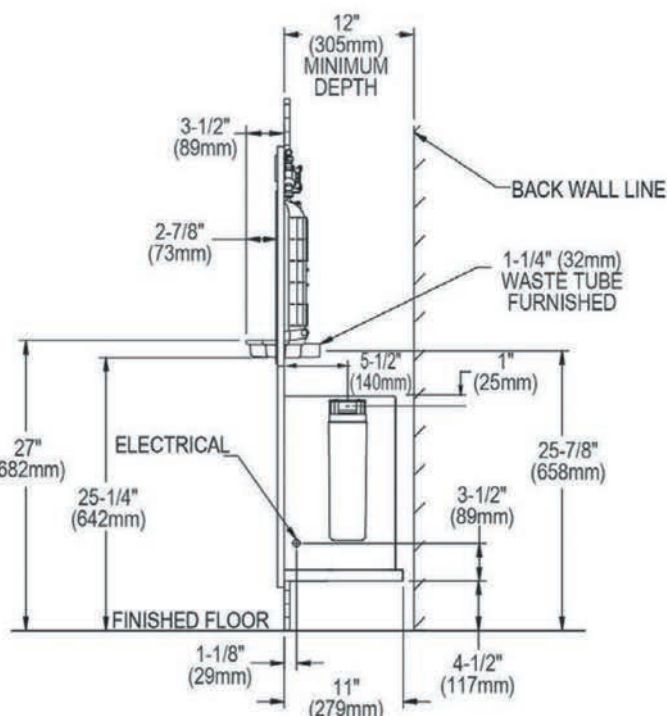


Information correct at time of printing, please check manufacturer website for latest installation information.

Call **01392 877 172** or email **hello@thirstywork.com** to build your drinking water system

MOUNTING FRAME MFWS100 WITH CHILLER SHELF

IMPORTANT! INSTALLER PLEASE NOTE:

The grounding of electrical equipment such as telephone, computers, etc. to water lines is a common procedure. This grounding may be in the building or may occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which causes a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by using the proper material as indicated below. The drain fittings which are provided by the installer should also be plastic to electrically isolate the cooler from the building plumbing system.

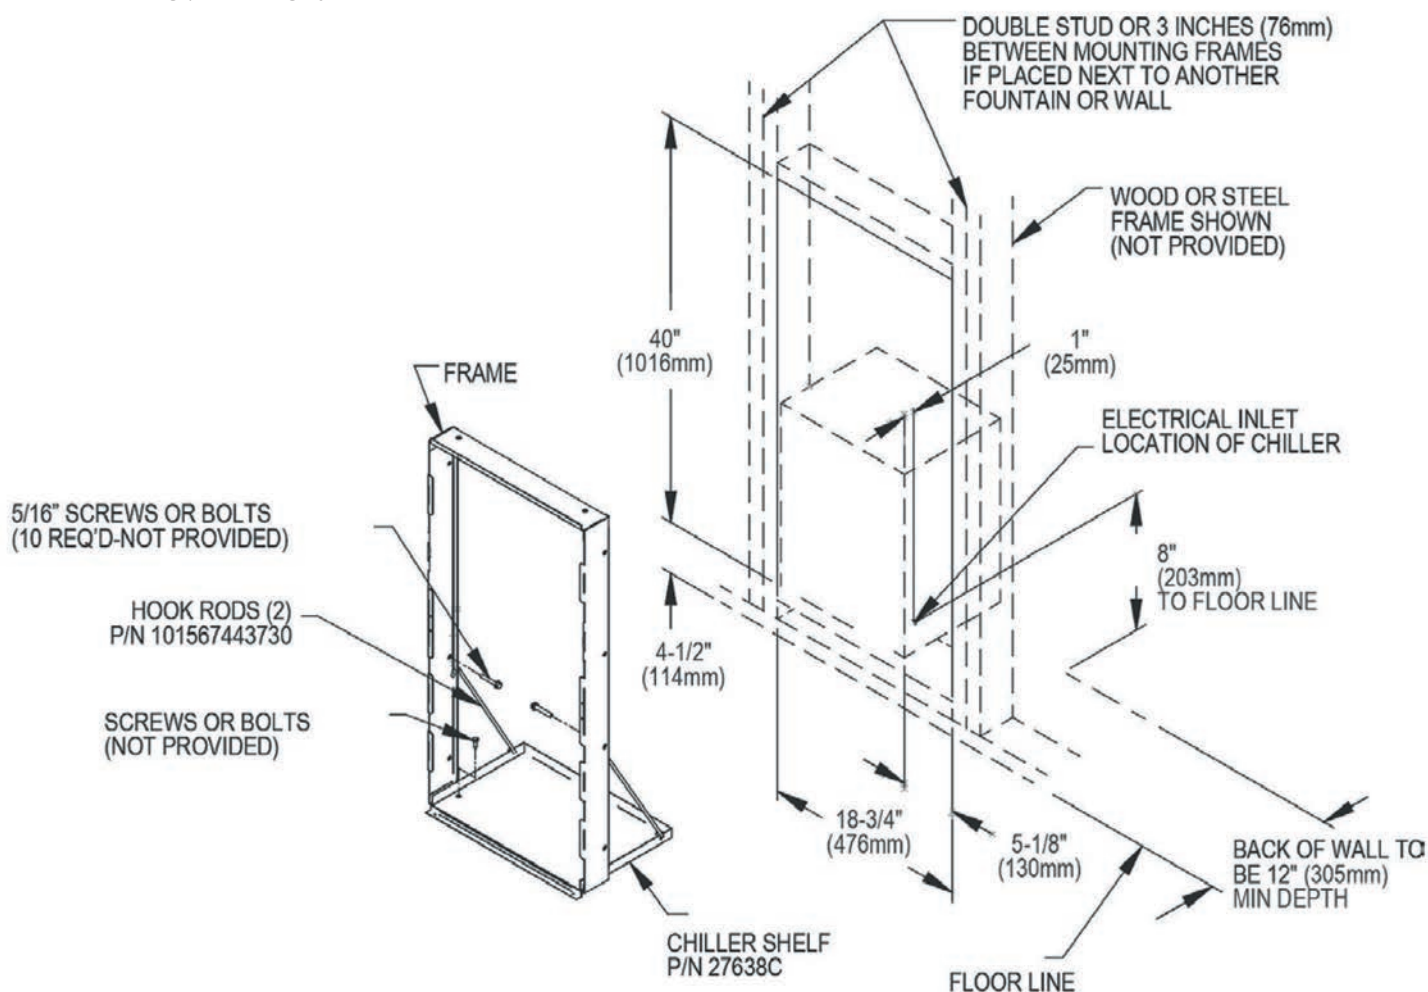

INSTALLATION REQUIREMENTS

The Elkay-EZH2O® requires adequate wall space for installation. Please ensure that the following is available where the system is to be installed. All of the below can be confirmed in your site survey:

- ✓ A potable mains water supply within 5 metres of unit installation location.
- ✓ A suitable waste pipe for the removal of excess water.
- ✓ A 240-volt electric socket within 1 metre of unit location.
- ✓ Installation requires an alcove in a stud wall structure capable of supporting the 35kg chiller unit.

Information correct at time of printing, please check manufacturer website for latest installation information.

FULL SPECIFICATION Elkey EZH2O® In-Wall Mounted Hands-free Filtered Bottle Filling Station

Rated input	220V/50Hz
Chilled throughput litres per hour	80L/h
Dimensions	502mm (W) x 90mm (D) x 1037mm (H)

AVAILABLE ACCESSORIES



Recyclable Paper Cups

- 7oz recyclable paper cups
- 4oz paper cones



Elkey Filtration

Providing lead and microplastic removal and the reduction of Class 1 particulate, cysts, and chlorine taste and odour, for the most refreshing water bottle refill.



Thirsty Work Water Bottles

Thirsty Work 500ml reusable stainless steel water bottles. 67mm x 270mm high.



Bespoke Printed Water Bottles

Add your own company logo to our 500ml reusable stainless steel water bottles. Available in a range of colours.



Remote Chiller

- Non-Filtered
- Can be placed anywhere within 10 metres of the install location
- Requires mains water and power connection
- 80 litre per hour



UV Water Steriliser

Utilising the most advanced UV technology, the unit has been designed to eliminate 99.99% of all waterborne microorganisms, including mould, bacteria and virus'



Request your no obligation 10 day trial

Call **01392 877 172** Email **hello@thirstywork.com**

www.thirstywork.com/free-trial