

Elkay-EZH2O®

Surface Mounted Refrigerated Hands-free Bottle Filling Station

Mains Fed · Wall Mounted · Chilled · Filtered



Hands-free sensor operated

trial it, love it, keep it!

Request your no obligation 10 day trial
Call **01392 877 172** Email **hello@thirstywork.com**www.thirstywork.com/free-trial LZ8WSSSMC



Elkay-EZH2O®

Chilled mains fed, wall mounted, bottle filler LZ8WSSSMC



COLOUR OPTIONS



Stainless Steel

WATER OPTIONS





Chilled

Filtered

INSTALLATION OPTIONS



Wall mounted

Real time counter shows water bottles saved from landfill



KEY FEATURES

- · Sensor activated bottle filler
- Refrigerated
- Surface wall-mounted for indoor use
- Suitable for busy public environments
- Laminar flow provides minimal splash
- Silver Ion Antimicrobial protection on key plastic components to inhibit the growth of mould and mildew
- Visual filter monitor
- Full filter change and servicing package included
- Built-in drainage eliminates standing water
- With Elkay filtration

The Elkay EZH2O® Surface Mounted Refrigerated, Filtered Hands-free Bottle Filling Station is the ideal drinking solution for visitors to high footfall indoor public areas, such as schools, health clubs, airports and hospitals.

Designed with user-friendliness in mind, the handsfree filling mechanism and laminar flow reduce the chance of spillages, while queues are cut through ease and speed of use. Water dispense flow is automatically ceased after 20 seconds.

The integrated Green Ticker informs users just how many 20oz plastic water bottles have been saved from waste through the use of the refill station.

DIMENSIONS

Height:	1048mm
Width:	454mm
Depth:	302mm

INSTALLATION INFORMATION Elkay EZH2O® Surface Mounted Refrigerated Hands-free Bottle Filling Station

IMPORTANT! INSTALLER PLEASE NOTE:

Ensure wall is structurally sound to bear the loads imparted by the surface mount bottle filler.


LEGEND:

- GEND:
 A. RECOMMENDED WATER SUPPLY LOCATION. SHUT-OFF VALVE (NOT FURNISHED). TO ACCEPT 3/8" O.D. UNPLATED COPPER TUBE. UP TO 3" (76mm) MAXIMUM OUT FROM WALL.
 B. RECOMMENDED WASTE OUTLET LOCATION. TO ACCOMODATE 1-1/4" NOMINAL DRAIN. DRAIN STUB 2" (51mm) OUT FROM WALL.
 C. 1-1/4" TRAP. (NOT FURNISHED)
 D. ELECTRICAL SUPPLY (3) WIRE RECESSED BOX DUPLEX OUTLET.
 E. INSURE PROPER VENTILATION BY MAINTAINING 8" (152mm) MINIMUM CLEARANCE FROM CABINET LOUVERS TO WALL.

- F. 7/16" (11mm) BOLT HOLES FOR FASTENING TO WALL

NOTE

NEW INSTALLATIONS MUST USE GROUND FAULT CIRCUIT INTERRUPTER (GFCI). IT IS HIGHLY RECOMMENDED THAT THE CIRCUIT BE DEDICATED AND THE LOAD PROTECTION BE SIZED FOR 20 AMPS.

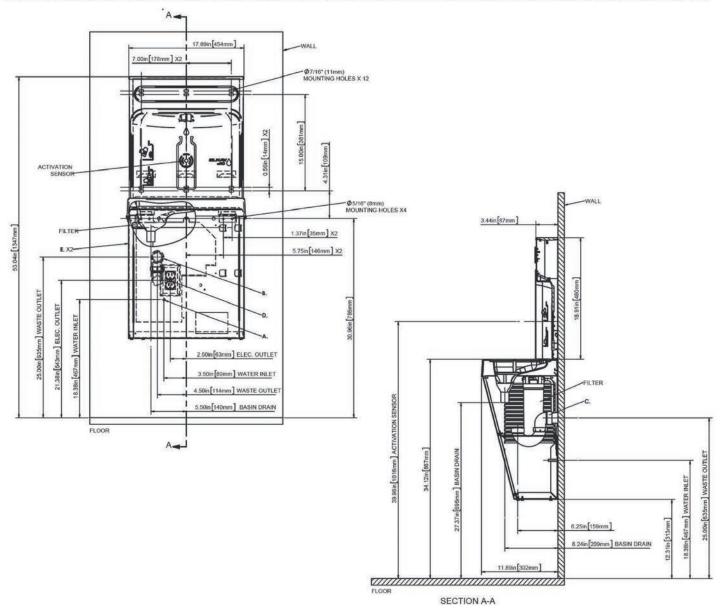

INSTALLATION REQUIREMENTS

The Elkay-EZH2O® requires adequate wall space for installation. Please ensure that the following is available where the system is to be installed. All of the below can be confirmed in your site survey:

- A potable mains water supply within 5 metres A suitable waste pipe for the removal of of unit installation location.
- excess water.
- A 240-volt electric socket within 1 metre of unit location.

Power	115V/60Hz
Throughput litres per hour	36
Dimensions	454mm (W) x 302mm (D) x 1048mm (H)

AVAILABLE ACCESSORIES



Recyclable Paper Cups

- 7oz recyclable paper cups
- 4oz paper cones



Thirsty Work Water Bottles

Thirsty Work 500ml reusable stainless steel water bottles. 67mm x 270mm high.



Bespoke Printed Water Bottles

Add your own company logo to our 500ml reusable stainless steel water bottles. Available in a range of colours.



UV Water Steriliser

Utilising the most advanced UV technology, the unit has been designed to eliminate 99.99% of all waterborne microorganisms, including mould, bacteria and virus'



Elkay Filtration

Providing lead and microplastic removal and the reduction of Class 1 particulate, cysts, and chlorine taste and odour, for the most refreshing water bottle refill.



Request your no obligation 10 day trial
Call **01392 877 172** Email **hello@thirstywork.com**www.thirstywork.com/free-trial