



# Oasis-HydroBoostWM Bottle Filler

Mains Fed • In-Wall Mounted • Ambient • Chilled • Filtered



*trial it, love it, keep it!*

Request your no obligation 10 day trial

Call **01392 877 172** Email **hello@thirstywork.com**

**[www.thirstywork.com/free-trial](http://www.thirstywork.com/free-trial)**

# Oasis-HydroBoostWM

Mains fed, in-wall mounted, bottle filler  
MW8EBFY



**hydrateconsciously!**  
We're committed to reducing plastic waste

## KEY FEATURES

- Electronic sensor activated bottle filler
- Chilled (refrigerated) model with non-refrigerated option
- In-wall mounted for indoor use
- Suitable for busy public environments
- 60 litres per hour of chilled water
- Enhanced alcove to fit larger sports bottle
- Contactless activation with shut off timer
- Integrated bottle counter
- Built in drain – no drip tray to empty
- Full filter change and servicing package included
- Built-in drainage eliminates standing water
- With **pura** filtration



## COLOUR OPTIONS



Brushed  
Stainless Steel

## WATER OPTIONS



Ambient



Chilled



Filtered

Not all options are included as standard, please choose at point of order



The Oasis-HydroBoostWM is a fully recessed mount, bottle filler, featuring a recessed design, allowing it to be built into your wall to save space. This bottle filler includes an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer.

Ideal for use in busy public buildings, gymnasiums, sports complexes, hospitals, schools, and offices.

The integrated bottle counter conveniently tracks and displays the number of refills.

## INSTALLATION OPTIONS



Wall mounted


## DIMENSIONS

Height:	1035mm
Width:	502mm
Depth:	460mm
Dispense height:	330mm

## INSTALLATION INFORMATION Oasis-HydroBoostWM surface-mounted, bottle filler

### Notes:

- 1 Recommended adult height installation shown. Adjust vertical dimensions as required to comply with federal, state and local codes.
- 2 Stop valve, trap, pipe connector to waste line not provided. Short radius trap required.
- 3 All dimensions are in inches. Dimensions in [ ] are in millimetres.
- 4 115v grounded North American duplex receptacle required. This drinking water cooler is intended to be connected to a 20a minimum ground fault circuit interrupting (GFCI) device to meet UL requirements.

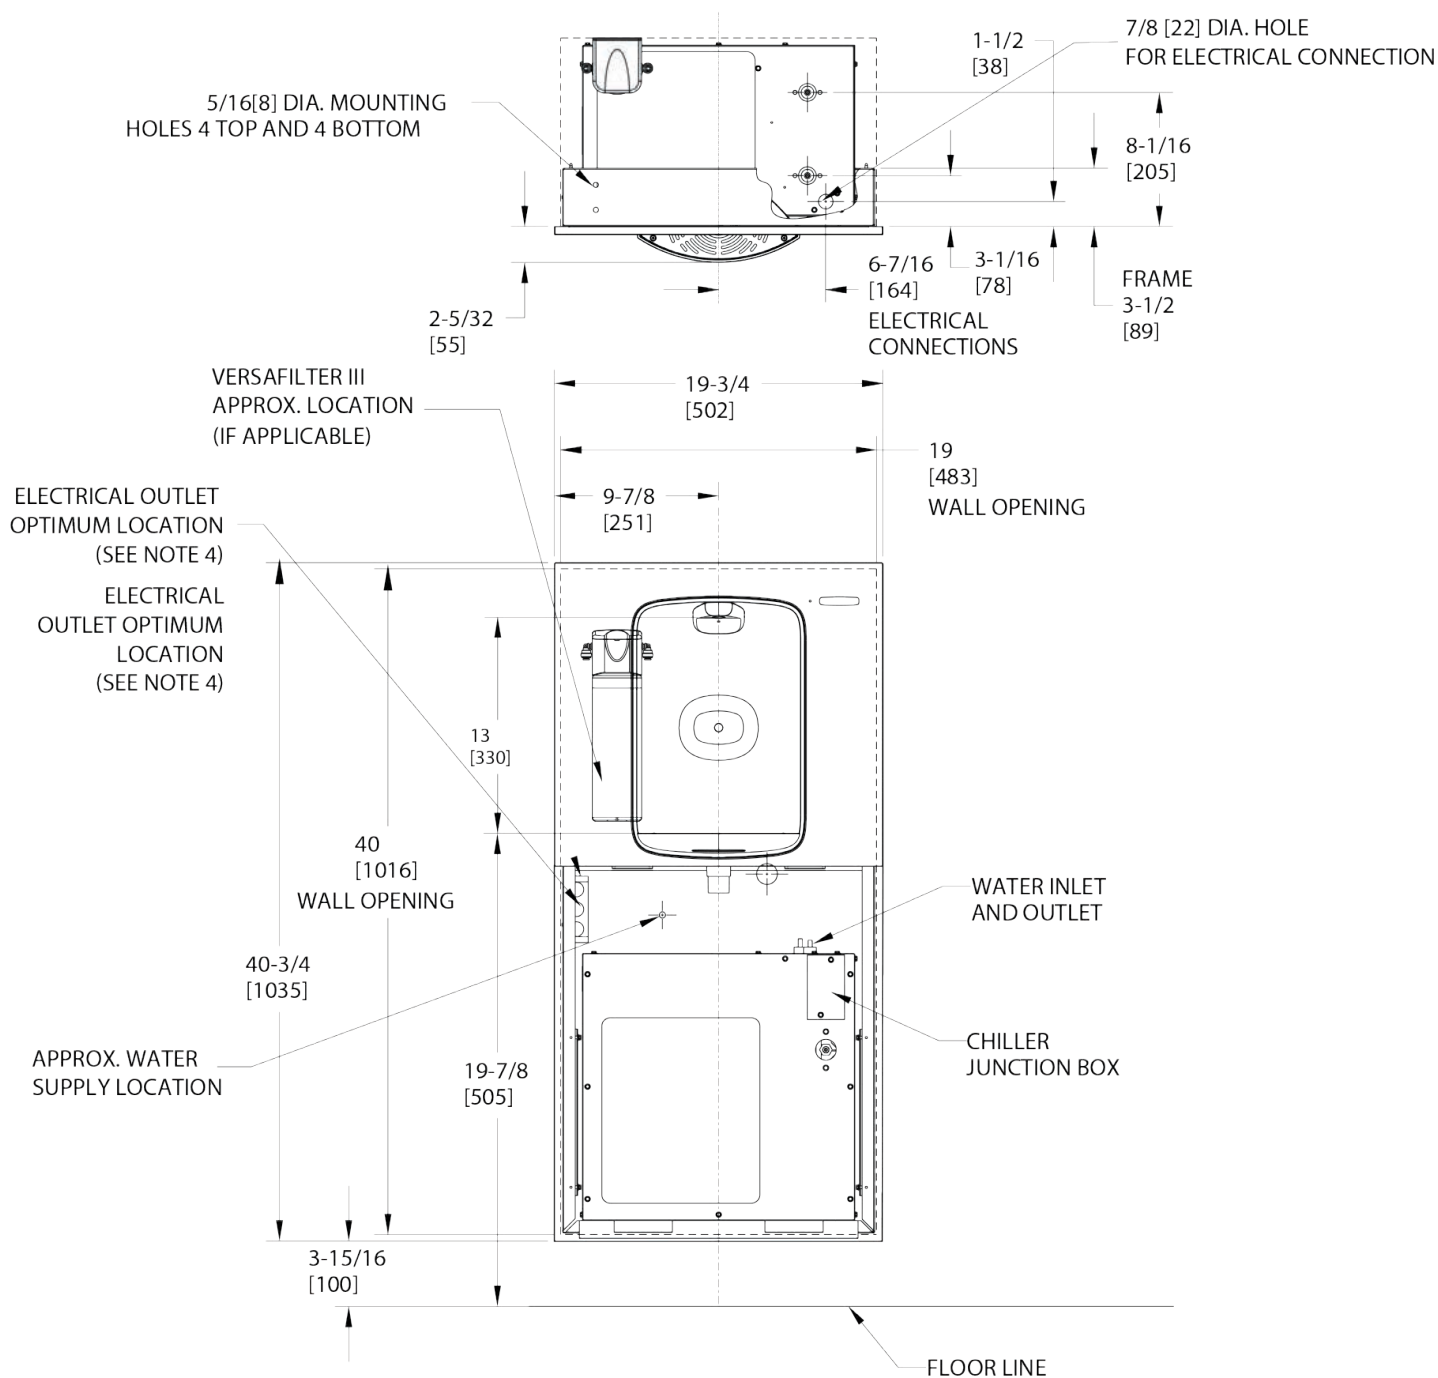


Information correct at time of printing, please check manufacturer website for latest installation information.

Call **01392 877 172** or email **hello@thirstywork.com** to build your drinking water system

## INSTALLATION INFORMATION Oasis-HydroBoostWM surface-mounted, bottle filler

### Notes:

- 1 Recommended adult height installation shown. Adjust vertical dimensions as required to comply with federal, state and local codes.
- 2 Stop valve, trap, pipe connector to waste line not provided. Short radius trap required.
- 3 All dimensions are in inches. Dimensions in [ ] are in millimetres.
- 4 115v grounded North American duplex receptacle required. This drinking water cooler is intended to be connected to a 20a minimum ground fault circuit interrupting (GFCI) device to meet UL requirements.

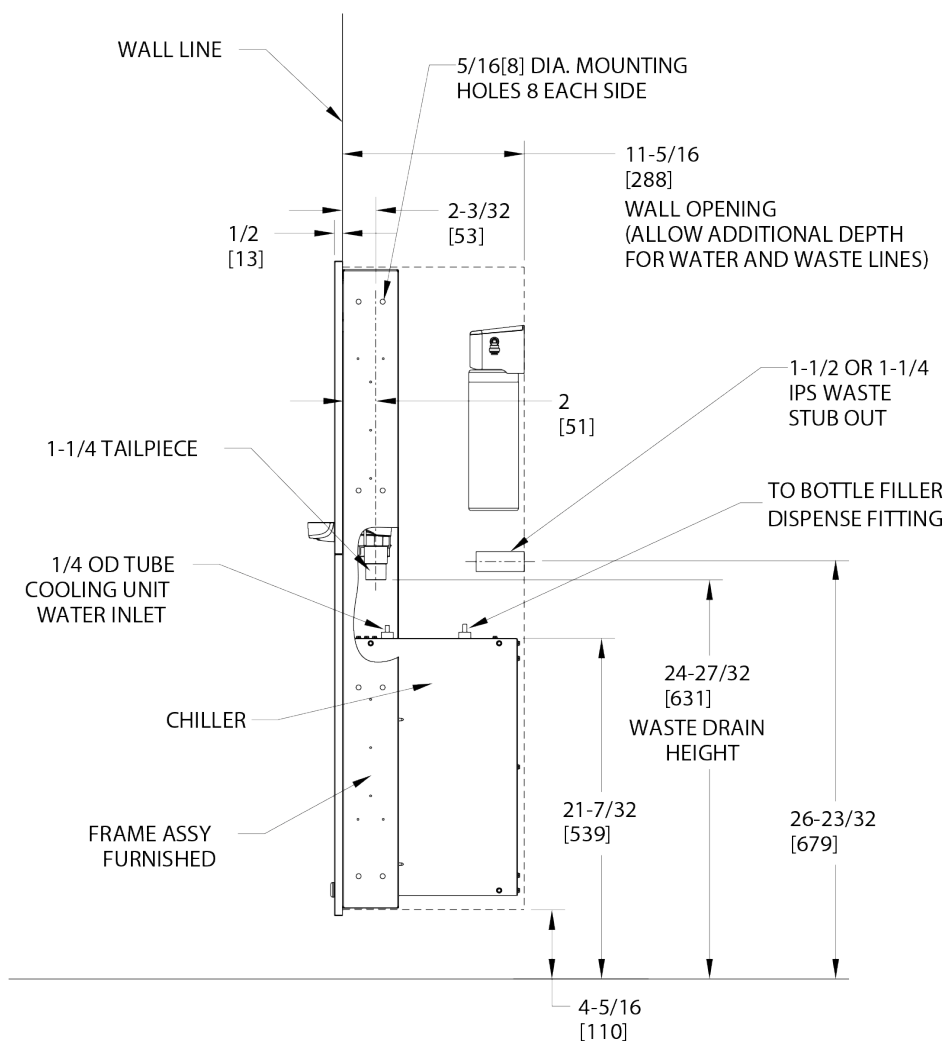

### INSTALLATION REQUIREMENTS

The Oasis-HydroboostWM requires adequate wall space for installation. Please ensure that the following is available where the system is to be installed. All of the below can be confirmed in your site survey:

- ✓ **A potable mains water supply within 5 metres of unit installation location.**
- ✓ **A suitable waste pipe for the removal of excess water.**
- ✓ **A 240-volt electric socket within 1 metre of unit location.**
- ✓ **Installation requires an alcove in a stud wall structure capable of supporting the 35kg chiller unit.**

Information correct at time of printing, please check manufacturer website for latest installation information.

Call **01392 877 172** or email **hello@thirstywork.com** to build your drinking water system

**FULL SPECIFICATION** Oasis-HydroBoostWM surface-mounted, bottle filler

Rated input	347W
Throughput litres per hour	60L/h
Dimensions	502mm (W) x 460mm (D) x 1035mm (H)
	Dispense height: 330mm

**AVAILABLE ACCESSORIES**



## Recyclable Paper Cups

- 7oz recyclable paper cups
- 4oz paper cones



## Remote Chiller

- Non-Filtered
- Can be placed anywhere within 10 metres of the install location
- Requires mains water and power connection
- 60 litre per hour
- 417mm (W) x 262mm (D) x 406mm (H)



## Thirsty Work Water Bottles

Thirsty Work 500ml reusable stainless steel water bottles. 67mm x 270mm high



## Bespoke Printed Water Bottles

Add your own company logo to our 500ml reusable stainless steel water bottles. Available in a range of colours



## UV Water Steriliser

Utilising the most advanced UV technology, the unit has been designed to eliminate 99.99% of all waterborne microorganisms, including mould, bacteria and virus'



Request your no obligation 10 day trial  
Call **01392 877 172** Email **hello@thirstywork.com**  
**www.thirstywork.com/free-trial**