



**thirstywork**

*we're all about water!*

# LK-HydroBoost

Mains Fed • In-Wall Mounted • Ambient • Filtered



Looking for a surface mounted model? Take a look at the LK-MaxUV with bespoke branding

*trial it, love it, keep it!*

Request your no obligation 10 day trial

Call **01392 877172** Email **hello@thirstywork.com**

**[www.thirstywork.com/free-trial](http://www.thirstywork.com/free-trial)**

# LK-HydroBoost

Mains fed, in-wall mounted, bottle filler  
HTHB8-WF



## KEY FEATURES

- Electronic sensor activated bottle filler
- Ambient water (non-refrigerated)
- Optional remote chiller for refrigeration
- In-wall mounted for indoor use
- Suitable for busy public environments
- Laminar flow provides minimal splash
- Silver Ion Antimicrobial protection on key plastic components to inhibit the growth of mould and mildew
- Full filter change and servicing package included
- Built-in drainage eliminates standing water
- With **pura** filtration
- Optional **puraguard** Antibacterial and antiviral protection

## COLOUR OPTIONS



Stainless Steel

## WATER OPTIONS



Ambient



Chilled option



Filtered

## INSTALLATION OPTIONS



Wall mounted

The LK-HydroBoost bottle filler features a recessed design, allowing it to be built into your wall to save space.

The dispenser's auto sensor automatically starts and stops the water flow when a bottle is placed into position, helping to save water and electricity.

The integrated Green Ticker informs users just how many 20oz plastic water bottles have been saved from waste through the use of the refill station.

## DIMENSIONS


Height:	1037mm
Width:	502mm
Depth:	305mm

IMPORTANT! INSTALLER PLEASE NOTE:


The grounding of electrical equipment such as telephone, computers, etc. to water lines is a common procedure. This grounding may be in the building or may occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which causes a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by using the proper material as indicated below. The drain fittings which are provided by the installer should also be plastic to electrically isolate the cooler from the building plumbing system.

These products are designed to operate on 20psi to 105psi supply line pressure.


OPERATION OF QUICK CONNECT FITTINGS




Pushing tube in before pulling it out helps to release tube




WaterSentry® Plus Filter System

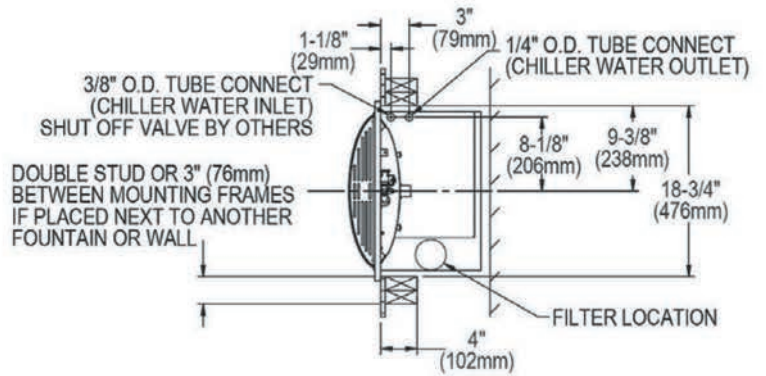

BOTTLE FILLER SPECIFICATIONS

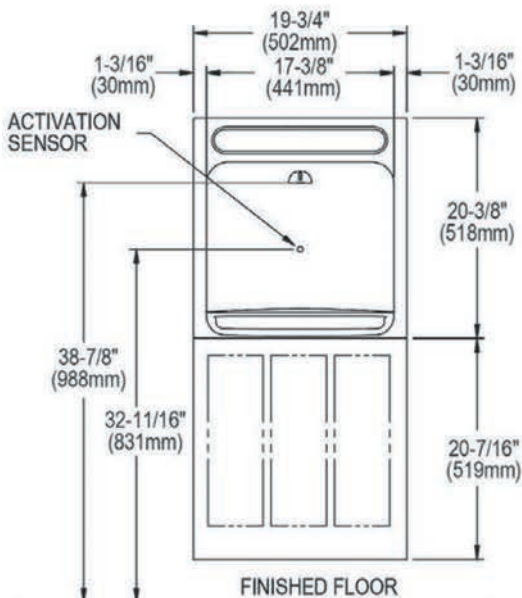


Note : New Installations Must Use Ground Fault Circuit Interrupter (GFCI). It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

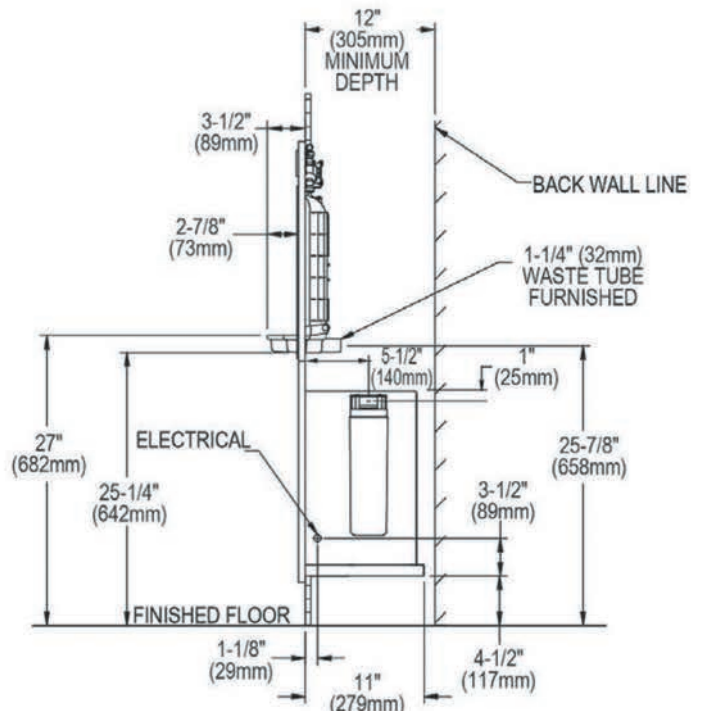

**MOUNTING FRAME MFWS100 WITH CHILLER SHELF**

IMPORTANT! INSTALLER PLEASE NOTE:

The grounding of electrical equipment such as telephone, computers, etc. to water lines is a common procedure. This grounding may be in the building or may occur away from the building. This grounding can cause electrical feedback into a water cooler creating an electrolysis which causes a metallic taste or causes an increase in the metal content of the water. This condition is avoidable by using the proper material as indicated below. The drain fittings which are provided by the installer should also be plastic to electrically isolate the cooler from the building plumbing system.

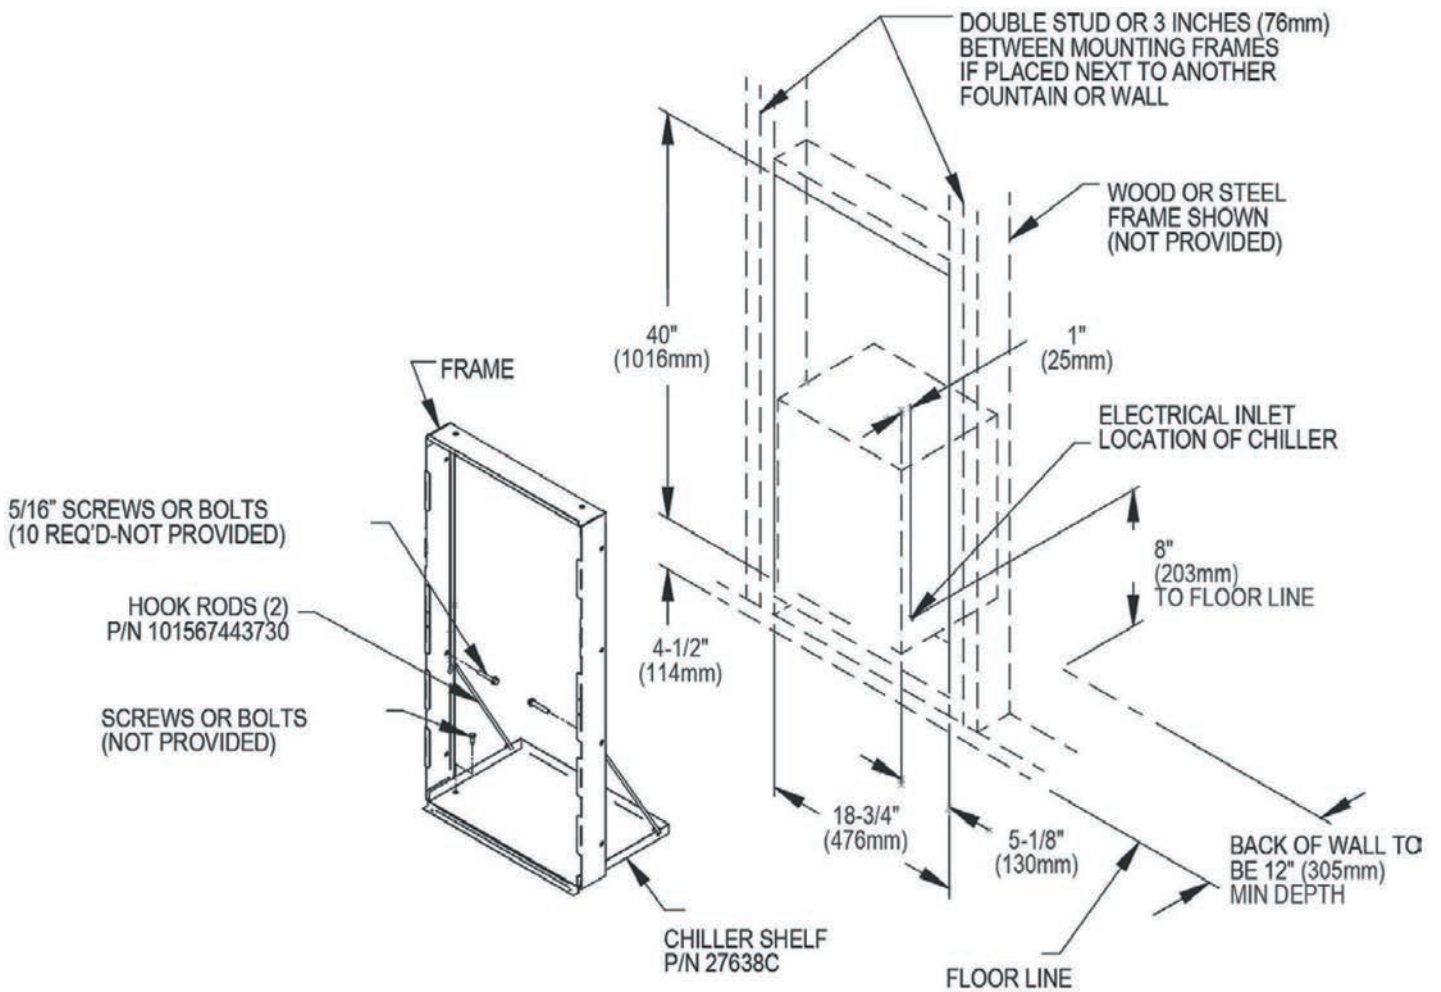

## FULL SPECIFICATION LK-HydroBoost surface-mounted, bottle filler

Rated input	370W
Throughput litres per hour	80L/h
Dimensions	502mm (W) x 305mm (D) x 1037mm (H)
	Dispense height: 310mm

### AVAILABLE ACCESSORIES



#### Paper Cups

- 7oz recyclable paper cups
- 7oz biodegradable and compostable paper cups
- 4oz paper cones



#### Remote Chiller

- Non-Filtered
- Can be placed anywhere within 10 metres of the install location
- Requires mains water and power connection
- 80 litre per hour



#### UV Water Steriliser

Utilising the most advanced UV technology, the unit has been designed to eliminate 99.99% of all waterborne microorganisms, including mould, bacteria and virus'



#### Puraguard

Puraguard is a ground-breaking protective antimicrobial coating that can be applied to your dispensers taps on request, providing 24hr protection against the growth of microbes (bacteria, moulds, fungi and virus')

*trial it, love it, keep it!*

Request your no obligation 10 day trial

Call **01392 877172** Email **hello@thirstywork.com**

**www.thirstywork.com/free-trial**