



HOSPITALITY TAP SYSTEM

T2 Tap

Chilled • Ambient • Sparkling • Filtered



Call **01392 877172** Email **hello@thirstywork.com** **www.thirstywork.com/pura-products**
pura is part of the thirsty work family of companies

T2 Tap

High capacity chilled and sparkling filtered water



COLOUR OPTIONS



Stainless Steel



Black

WATER OPTIONS



Chilled



Ambient



Sparkling



Filtered

INSTALLATION OPTIONS



Over Font



Under-counter
Unit

KEY FEATURES

- High capacity output
- Chilled & ambient, chilled & sparkling and chilled, ambient & sparkling water options
- Chilled temperature - 2°C to 11°C
- Compact under-counter unit
- Elegant, minimalistic design
- Discreet, hygienic control panel
- Stainless steel or black finish
- Energy efficient
- Standby mode
- Built-in drip tray
- Simple-fit ventilation base included with + model
- With **pura3000** filtration

The T2 is a next-generation digital tap system that integrates seamlessly into any work area or communal space. Accompanied by an undercounter unit it is built for high-capacity dispensing of still and sparkling water.

With a built-in drip tray and 310mm dispense area for refilling bottles and jugs, it's a highly practical solution for modern workplaces.

The inbuilt **pura3000** filter puts better-tasting water on tap, filtering out chlorine taste and odour and impurities as tiny as one ten-thousandth of a millimetre, but does not remove beneficial fluoride.

DIMENSIONS

Tap height:	390mm
Dispense height:	310mm
Tap width with font:	160mm
Tap depth with font:	325mm

Dispense chilled and sparkling filtered water, instantly.

TYPICAL SPECIFICATION

The T2 tap design is stylishly minimal. It is accompanied by a compact yet high capacity under-counter unit that fits unobtrusively out of sight, enabling the T2 to seamlessly integrate into any workspace or communal setting.

The system delivers a speedy throughput of between 50 and 80 litres per hour at a consistent chilled temperature, making it the perfect solution for busy environments.



This design-led commercial water dispenser is consistently energy efficient, making it both economical and eco-friendly. It's also fitted with a low light sensor which sends the appliance into standby mode when the room is unoccupied.



The discreet digital touch panel has an antimicrobial coating for a reassuringly clean experience.



Chilled, sparkling, or ambient water can also be dispensed touch-free via the Bluetooth® app.



Call our **pura** consultant on 01392 877172 or email hello@thirstywork.com to build your hospitality package

OUTPUT OPTIONS

The T2 is fed from an under-counter unit. There are two output options to suit your requirements.

T2 Model	Chilled litres/hr	Sparkling litres/hr	Max power consumption	Water System	Under-counter unit dimensions (mm)
T2 ProCore	50	50	140W - 200W	Dry Chill®	W 320 x D 375 x H 335
T2 ProCore+*	80	80	140W - 200W	Dry Chill®	W 320 x D 375 x H 350

* Includes Simple-fit Ventilation Base W 322 x D 431 x H 60mm (Includes 20mm overhang)

AVAILABLE ACCESSORIES



Under-counter Unit

Our T2 Tap must be accompanied by our under-counter water chiller. It is compact, low maintenance and easy to install out of sight.



Paper Cups

- 7oz recyclable paper cups
- 7oz biodegradable and compostable paper cups
- 4oz paper cones



Accessories

- CO² refills
- LED-UV water purification system
- Waste kit overflow sensor

**60
bottles
£10.95
each**

**120
bottles
£8.95
each**

FULL
WRAP
PRINT
AREA



Branded Glass Water Bottles

Add your own company logo to our 750ml glass bottle.

Through our bespoke printing service you can brand as little as 60 bottles with your own company design and logo.

Simply supply us with your vector artwork. Set-up, delivery and full colour printing is included. All prices exclude VAT.

- Cut single-use, plastic bottled water
- Reduce the environmental impact of transportation and packaging waste
- Gain fridge and storeroom space

Visit our website for glass bottle printing options and pricing www.thirstywork.com/pura-products

Call our **pura** consultant on 01392 877172 or email hello@thirstywork.com to build your hospitality package

INSTALLATION

CHILLING SYSTEM

Stainless steel direct chill coil encased in a solid-block system for instant response cool down action. Ultra efficiency compression system with capillary control.

Environmentally friendly R290 refrigerant.

Chilled temperature 2°C to 11°C.

Flow rate maximum 3.5 bar water supply pressure.

VENTILATION

It is recommended that an inlet vent grille is set into the plinth with a corresponding vent grille in the base of the cabinet behind the undercounter unit to allow the air to flow past the condenser.


An exhaust vent grille is also required at the top if the cabinet. It is recommended either behind the tap in the work surface or at the side of the cabinet for a more unobtrusive appearance should this area be available.

PLUMBING

Must be installed in accordance with UK Water Supply Regulations.

Mains potable water internally regulated to 0.3MPa (3 bar). Min mains pressure 0.05MPa (0.5 bar).

Waste Drain Connection

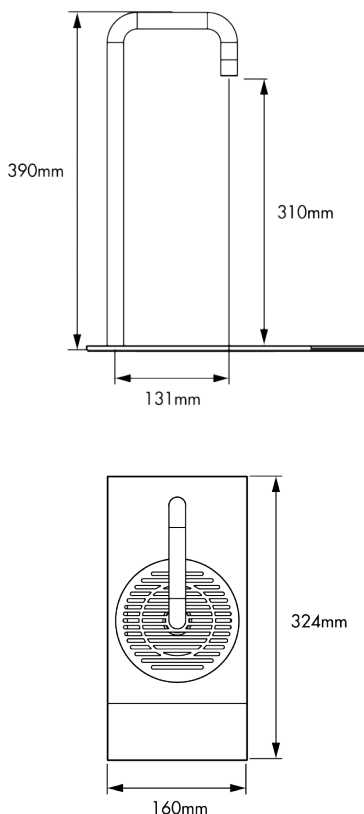

ELECTRICITY

13A supply – Earth Leakage Protected.

FILTRATION

In hard water areas where mineral scale accumulation may be an issue, consideration should be given to the maintenance required.

We recommend use of the high performance **pura3000** filtration system.

CARBON DIOXIDE

Great care must be employed when working with high pressure carbon dioxide, and in no cases should the maximum operating pressure of 58 PSI (4 bar) be exceeded.


The disposable CO² gas cylinder (not supplied) must be secured in an upright position in a ventilated area not less than 38 cubic metres.

Each cylinder contains 1kg of CO².

APPROVALS

CE endorsed.

Refer to manufacturer guidelines for latest installation information.

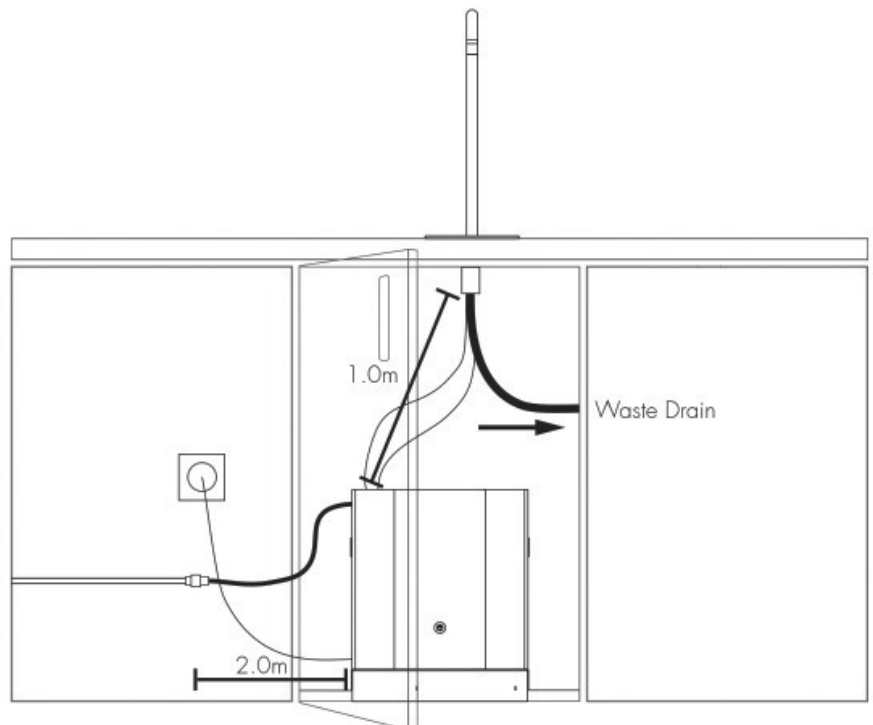


INSTALLATION

Identify a suitable location for the ProCore unit. It should be positioned within 1.0m of the faucet, and within 2.0m of suitable services connections.

Allow enough space to fit the ventilation ducting system.

Please ask us for a cutting template before installation and check all information.

Identify a suitable position for the faucet. Refer to the cut out guide template. Also allow for the height of the swan neck under any overhanging cupboard/shelf.

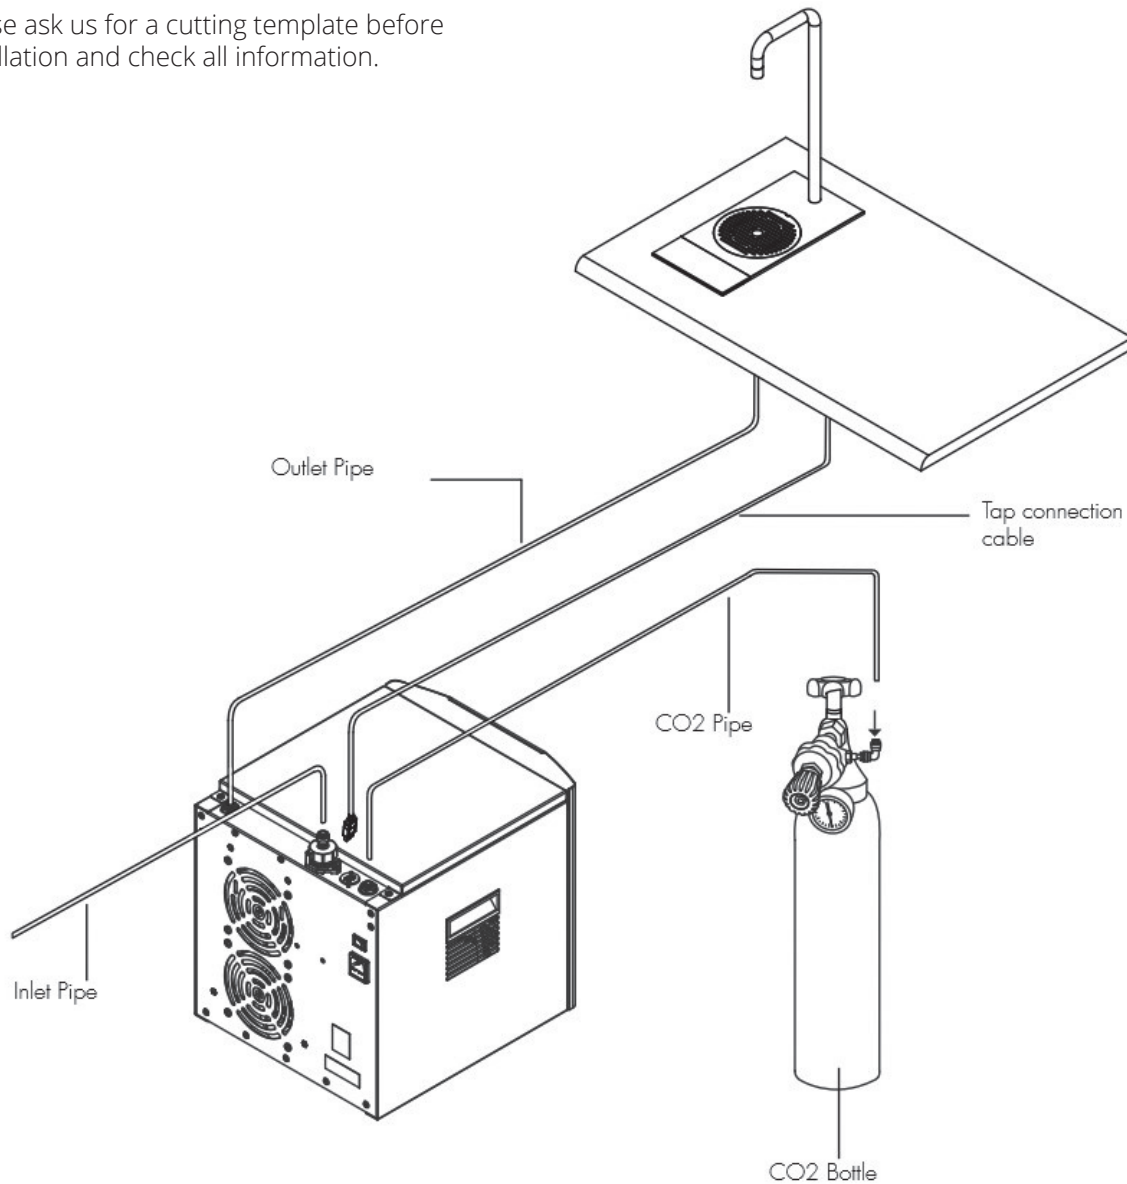

Call **01392 877172** Email **hello@thirstywork.com** **www.thirstywork.com/pura-products**
pura is part of the thirsty work family of companies